


Applications- Heat Exchangers



Taper-Lok® High Pressure Closure

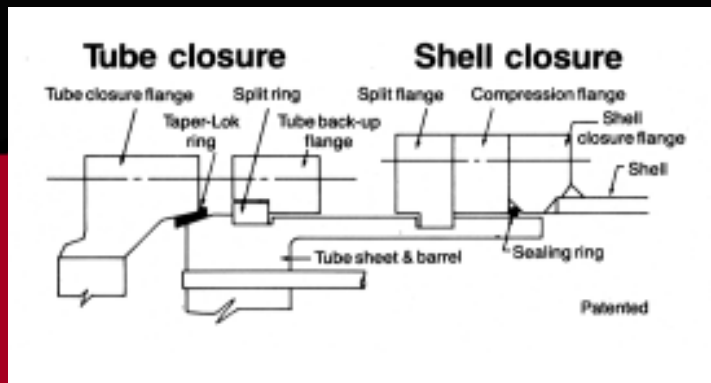

Our Taper-Lok closure is typically used for high pressure (up to 15,000 psi, or 1055 kg/cm²) applications. Like our Separated-Head, the Taper-Lok® uses separate tube side and shell side flanges, bolting, and gasketing. The unique feature this closure offers is a reusable Taper-Lok® ring which acts as a self-energizing seal.

- **Brown Fintube**
- **Service since 1970**
- **Hairpin type heat exchangers**
- **Applications range from 1” to 48”**
- **In twenty five year period, over 300 million leak free hours**
- **“NEVER had a field complaint”**

